SAFEWAY

A BRAND OF DEE RON AUTOMOTIVES LLP

www.safewaytyre.com

Safeway Tyre

SAFEWAY
A BRAND OF DEE RON AUTOMOTIVES LLP

Company Introduction



Mr. Sandeep Chaudhary,
DIRECTOR

Safeway Tyre began its journey in 2016 with a strong foundation in manufacturing premium-quality inner tubes for the Indian automotive market. Over time, guided by a commitment to quality, performance, and customer trust, the company has grown into a dynamic and diversified tyre and tube manufacturing unit with a global outlook. From our humble beginnings to becoming a trusted name in the international tyre industry, Safeway Tyre is now a symbol of performance, reliability, and world-class engineering. Our advanced manufacturing facility is equipped with cutting-edge machinery, automated systems, and most importantly – a world-class in-house testing laboratory.

This dedicated testing lab is at the heart of our quality assurance process. Every product undergoes rigorous testing to ensure it meets the highest global standards for durability, performance, and safety. Our lab simulates real-world road and load conditions, so that our tyres and tubes never let you – or your customers – down. It's a level of reliability and quality your clients can trust with their eyes closed

At Safeway Tyre, our promise goes beyond just products – we deliver confidence on every road. Every tyre and tube that leaves our facility carries with it our dedication to superior craftsmanship, trusted performance, and relentless testing – ensuring safety, efficiency, and peace of mind for you and your clients.

We're proud to be the tyre and tube partner of choice for businesses and distributors around the world, and we look forward to continuing this journey with you – with products that keep the world moving, safely and smoothly

SAFEWAY
A BRAND OF DEE RON AUTOMOTIVES LLP

Our Story

Born from Purpose, Driven by Integrity Every great journey begins with a powerful reason. The story of Safeway Tyre began not in a boardroom, but with a moment that changed everything.

Two seasoned engineers, with years of experience working at leading global tyre manufacturers, were confronted with a tragic incident: a customer suffered a fatal injury due to the failure of a substandard tyre. The event shook them to their core. In that moment, they realized that no product – regardless of market share or brand recognition – should ever compromise on safety.

That very day, they made a bold decision.

They resigned from their positions and committed themselves to a higher mission: to build a company where safety is not a slogan, but a promise. A company where every tyre is crafted with precision, tested with rigor, and engineered to protect lives.

From this vision, Safeway Tyre was born—a brand with one unwavering purpose: To find a safer way forward.

They worked tirelessly, day and night, to create a manufacturing ecosystem where quality is absolute, innovation is encouraged, and every tyre represents a standard the world can rely on.

Today, Safeway Tyre is more than a manufacturer. It's a legacy of responsibility, craftsmanship, and unshakable trust. Every product we deliver carries the commitment of two engineers who chose people over profit, integrity over shortcuts, and safety over everything else

SAFEWAY
A BRAND OF DEE RON AUTOMOTIVES LLP

OUR COMPREHENSIVE PRODUCT RANGE

- **Truck & Bus Tyres** – Engineered for maximum mileage, load endurance, and rugged terrain.
- **Three-Wheeler Tyres** – Designed for durability and balance under frequent urban and commercial use.
- **Agricultural Tyres** – Providing excellent traction, reduced soil compaction, and long-lasting field performance.
- **Off-the-Road (OTR) Tyres** – Tough-built tyres ready to take on mining, infrastructure, and earthmoving challenges.
- **Forklift & Industrial Tyres** – Built for heavy-duty operations in logistics, warehousing, and material handling sectors.
- **Motorcycle & Scooter Tyres** – Optimized for control, safety, and smooth riding in both city and highway conditions.
- **Automotive Tubes** – Our legacy product, manufactured with precision and advanced materials to ensure airtight performance, high elasticity, and maximum durability across all vehicle categories.



SAFEWAY

A BRAND OF DEE RON AUTOMOTIVES LLP



TRUCK & BUS TYRES

TRUCK & BUS TYRE

TT-101



						Maximum Load		Cold Inflation Pressure			
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
6.50-14	Light Tuck	8	182	705	10.5	840	795	60	425	60	425
6.50-15	Light Truck	10	175	725	11.5	970	920	73	500	73	500
7.00-15	Light Truck	12	205	760	11.5	1175	1030	90	620	90	620
7.50-15	Light Truck	14	215	780	13	1450	1375	94	650	94	650
7.00-16	Light Truck	14	200	796	12.5	1315	1160	100	690	100	690
7.50-16	Light Truck	16	222	830	12.5	1580	1390	110	760	110	760
8.25-16	Light Truck	16	235	860	14	1845	1755	110	760	110	760
8.25-20	Truck/Bus	16	232	970	14	2300	2000	120	825	110	760
9.00-20	Truck/Bus	16	262	1035	14	2650	2360	115	795	105	725
10.00-20	Truck/Bus	18	280	1065	15.5	3080	2700	120	825	110	760
10.00-20	Truck/Bus	18	285	1080	18.5	3080	2700	120	825	110	760
11.00-20	Truck/Bus	18	300	1090	17	3355	2945	120	825	110	760
11.00-20	Truck/Bus	18	300	1090	15	3355	2945	120	825	110	760



TRUCK & BUS TYRE

TT-108

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
65.0-14	Light Tuck	10	182	705	-	840	795	60	425	60	425
7.00-15	Light Truck	12	205	770	17	1175	1030	90	620	90	620
7.50-15	Light Truck	14	220	800	15	1450	1375	94	650	94	650
7.00-16	Light Truck	14	205	807	18	1315	1160	100	690	100	690
7.50-16	Light Truck	16	220	860	17.4	1580	1390	110	760	110	760
8.25-16	Light Truck	16	230	835	17.6	1845	1755	110	760	110	760
10.00-20	Truck/Bus	18	280	1065	21.5	3080	2700	120	825	110	760
11.00-20	Truck/Bus	18	292	1110	21.5	3355	2945	120	825	110	760
12.00-20	Truck/Bus	18	314	1140	21.5	3725	3265	115	795	105	725

TRUCK & BUS TYRE

TT - 119



Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
12.00-24	Truck/Bus	20	315	1230	20	4500	3875	125	860	110	760

TRUCK & BUS TYRE

TT - 127



Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
7.50-16	Light Truck	16	220	835	16	1580	1390	110	760	110	760
12.00-24	Truck/Bus	20	315	1235	20	4500	3875	125	860	115	795

TRUCK & BUS TYRE

TT - 132



Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
7.50-16	Light Truck	16	213	827	17	1580	1390	110	760	110	760
10.00-20	Truck/Bus	18	278	1078	19.5	3080	2700	120	825	110	760

TRUCK & BUS TYRE

TT - 137



Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
7.50-16	Light Truck	16	218	835	12.5	1580	1390	110	760	110	760

TRUCK & BUS TYRE

POWERMINER



Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						(Kgs.)		(PSI)		(Kpa)	
9.00-20	Mining (Truck)	16	265	1065	22.5	2500		101		700	
10.00-20	Mining (Truck)	18	275	1075	22.5	2800		110		760	
11.00-20	Mining (Truck)	18	292	1117	22.5	300		110		760	
12.00-20	Mining (Truck)	20	319	153	22	4000	125	8.6	3450	115	7.9
12.00-24	Mining (Truck)	20	320	1246	21.9	4500	125	8.6	3875	115	7.9
9.00-15	Mining (Truck)	6	254	845	10	975	75	5.2	975	75	5.2
9.00-16	Mining (Truck)	8	245	880	10	975	75	5.2	975	75	5.2

SAFEWAY
A BRAND OF DEE RON AUTOMOTIVES LLP



THREE WHEELER TYRE

THREE-WHEELER TYRE

TW - 17



						Maximum Load	Cold Inflation Pressure	
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia.(mm)	Non Skid Depth (mm)	(Kgs.)	(PSI)	(Kpa)
4.00-8	Passenger	6	114	415	9.0	462	72.5	500
4.00-8	Passenger	8	114	415	9.0	462	72.5	500

THREE-WHEELER TYRE

TW - 21



						Maximum Load	Cold Inflation Pressure	
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia.(mm)	Non Skid Depth (mm)	(Kgs.)	(PSI)	(Kpa)
4.00-8	Passenger	6	114	415	8.0	462	72.5	500
4.00-8	Passenger	8	114	415	8.0	462	72.5	500
4.50-10	Passenger	8	121	497	9.0	515	72.5	500

SAFEWAY

A BRAND OF DEE RON AUTOMOTIVES LLP



AGRICULTURE TYRES

AGRICULTURE TYRE

TR - 1010



FLOTATION IMPLEMENT TYRES

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load	Cold Inflation Pressure	
						Single	Single	
						(Kgs)	(PSI)	(Kpa)
400/60-15.5	Implement	14	400	875	20	2900	52	360

AGRICULTURE TYRE

TR - 1019



AGRICULTURAL IMPLEMENT TYRES

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load	Cold Inflation Pressure	
						Single	Single	
						(Kgs)	(PSI)	(Kpa)
9.5L-14	Implement	8	235	1280	8	1090	44	300
11L-14	Implement	8	256	1365	8	1120	36	250
9.5L-15	Implement	10	240	1310	10	1285	54	370
11L-15	Implement	10	270	1365	10	1320	44	300

AGRICULTURE TYRE

TR - 1020



AGRICULTURAL IMPLEMENT TYRES

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load	Cold Inflation Pressure	
						Single	Single	
						(Kgs)	(PSI)	(Kpa)
6.00-16	Implement	8	165	735	16	615	68	470
7.50-16	Implement	8	207	810	17	775	56	385
9.00-16	Implement	10	265	880	28	1215	55	380
10.00-16	Implement	10	275	890	28	1215	55	380
11.0-16	Implement	10	310	970	28	1360	51	350

AGRICULTURE TYRE

TR - 1022



AGRICULTURAL IMPLEMENT TYRES

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load	Cold Inflation Pressure	
						Single	Single	
						(Kgs)	(PSI)	(Kpa)
10/80-12	Implement	10	264	700	11	1450	56	390
10.0/75-15.3	Implement	12	264	760	11	1700	68	470
11.5/80-15.3	Implement	12	290	845	11	2180	59	410
12.5/80-15.3	Implement	14	310	885	11	2650	62	430
10.5/65-16	Implement	14	274	755	8	1900	77	530
10.5/80-18	Implement	14	275	885	8	2360	74	510
12.5/80-18	Implement	12	308	965	8	2650	54	370

AGRICULTURE TYRE

TR - 1042



BIAS TRACTOR FRONT TYRES

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load	Cold Inflation Pressure	
						Single	Single	
						(Kgs)	(PSI)	(Kpa)
6.00-16	Tractor Front	10	170	740	20	710	75	520
6.50-16	Tractor Front	8	175	760	13	750	48	330
7.50-16	Tractor Front	10	207	815	17	775	56	385

AGRICULTURE TYRE

TR - 1047



BIAS TRACTOR FRONT TYRES

Tyre Size	Ply Rating	Rim Width	TT/TL	Section Width	Overall Diameter	"Static Loaded Radius"	"Rolling Circum +/- 2.5%"	NSD	Load capacity	Inflation Pressure	Load Index	Speed
		(Inch)		(mm/inch)	(mm/inch)	mm	mm	mm	Kgs/Lbs	Bar/Psi		Kmph/Mph
6.00-16	8	4.5	TL	165/6.5	735/28.9	346	2190	16	615/1350	4.70/68	91/A8	40/25
7.50-16	8	5.5	TL	207/8.1	810/31.9	379	2414	17	775/1710	3.85/56	99/A8	40/25
9.00-16	10	8	TL	265/10.8	880/35	410	2682	28	1215/2680	3.80/55	115/A8	40/25
10.00-16	10	8	TL	275/10.8	890/35	410	2682	28	1215/2680	3.80/55	115/A8	40/25
11.00-16	10	10	TL	310/12.2	970/38.2	448	2890	28	1360/3000	3.50/51	119/A8	40/25

AGRICULTURE TYRE

TR - 1055



BIAS TRACTOR REAR TYRES (R1)

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load	Cold Inflation Pressure	
						Single	Single	
						(Kgs)	(PSI)	(Kpa)
8.3-24	Farm	6	211	995	26	810	34	230
9.5-24	Farm	8	230	1055	26	1120	41	280
11.2-24	Farm	8	232	1056	27	1550	36	248
12.4-24	Farm	12	335	1155	28	1820	50	350
13.6-24	Farm	12	345	1209	36	1900	42	209
14.9-24	Farm	12	375	1265	26	2000	38	260
16.9-28	Farm	12	430	1420	31	2240	30	207
16.9-30	Farm	14	450	1495	38	3150	52	360
18.4-30	Farm	14	470	1565	38	3450	37	260
23.1-30	Farm	14	590	1710	43	4250	29	200
16.9-34	Farm	12	429	1585	29	2500	32	220
18.4-34	Farm	14	462	1635	28	3750	38	260
11.2-38	Farm	12	285	1250	29	1285	26	180
13.6-38	Farm	12	345	1565	37	2430	44	300
15.5-38	Farm	8	385	1620	38	2060	26	180
18.4-38	Farm	14	470	1762	37	3837	36	248
20.8-38	Farm	14	532	1852	36	4500	35	241

AGRICULTURE TYRE

TR - 1065




IRRIGATION TYRES

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load	Cold Inflation Pressure	
						Single	Single	
						(Kgs)	(PSI)	(Kpa)
11.2-24	Farm	8	284	1090	25	1250	35	240
14.9-24	Farm	8	375	1245	26	1800	26	180
11.2-38	Farm	8	284	1445	26	1500	33	230

AGRICULTURE TYRE

TR - 1070



TILLER APPLICATION TYRE

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load	Cold Inflation Pressure	
						Single	Single	
						(Kgs)	(PSI)	(Kpa)
4.00-8	Farm	6	114	411	16	1250	40	275
6.00-12	Farm	8	155	633	17	1800	58	400
7.00-12	Farm	8	200	667	16	1500	52	360
6.00-16	Farm	8	169	735				

AGRICULTURE TYRE

TR - 1095



DRIVE WHEEL TYRES (R2)

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load	Cold Inflation Pressure	
						Single	Single	
						(Kgs)	(PSI)	(Kpa)
12.4-28	Farm	12	322	1280	38	1650	36	250
13.6-28	Farm	12	345	1310	36	1800	33	230
14.9-28	Farm	12	378	1365	36	2120	33	230
18.4-30	Farm	14	470	1565	38	3450	37	260
16.9-30	Farm	14	450	1495	38			

SAFEWAY
A BRAND OF DEE RON AUTOMOTIVES LLP



OFF-THE-ROAD (OTR) TYRES

OFF-THE-ROAD (OTR) TYRE

OT-SS-01



SKID STEER TYRES

						at 15 kmph / 10 mph			at 10 kmph / 5 mph		
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
10-16.5	Loader	12	265	800	14	2185	75	5.2	2765	75	5.2
12-16.5	Loader	12	325	850	35	2265	80	5.5	2865	80	5.5
14-17.5	Loader	14	350	920	22						

OFF-THE-ROAD (OTR) TYRE

OT-SS-02



SKID STEER TYRES

						at 15 kmph / 10 mph			at 10 kmph / 5 mph		
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
10-16.5	Loader	12	267	795	28	2185	75	5.2	2765	75	5.2
12-16.5	Loader	12	367	845	28	2265	80	5.5	2865	80	5.5



OFF-THE-ROAD (OTR) TYRE

OT - L5

INDUSTRIAL BACKHOE LOADER TYRES (L5)

						at 15 kmph / 10 mph			at 10 kmph / 5 mph		
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
10-16.5	Loader	12	259	798	35	2185	75	5.2	2765	75	5.2
12-16.5	Loader	12	325	850	35	2260	80	5.5	2865	80	5.5



OFF-THE-ROAD (OTR) TYRE

OT - MPT-01

MULTIPURPOSE TYRES (MPT-01)

						at 15 kmph / 10 mph			at 10 kmph / 5 mph		
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
12.5/80-18	Loader	14	310	990	26	3150	71	4.9	2180	71	4.9



OFF-THE-ROAD (OTR) TYRE

OT - MPT-02

MULTIPURPOSE TYRES (MPT-02)

Tyre Size	Ply Rating	Rim Width	TT/TL	Section Width	Overall Diameter	"Static Loaded Radius"	"Rolling Circum +/- 2.5%"	NSD	Load capacity	Inflation Pressure	Load Index	Speed
		(Inch)		(mm/inch)	(mm/inch)	mm	mm	mm	Kgs/Lbs	Bar/Psi		Kmph/Mph
12.5/80-18	16	9	TL	308/12.1	980/38.6	438	2896	27	3150/6940	4.90/71	148/A8	40/25

OFF-THE-ROAD (OTR) TYRE

OT - R4



INDUSTRIAL BACKHOE LOADER TYRES (R4)

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
16.9-24	Industrial	12	440	1310	27	2900	32	2.2
19.5L-24	Industrial	16	490	1325	30	4125	42	2.9
18.4-26	Industrial	12	472	1425	28	4375	42	2.9
16.9-28	Industrial	12	440	1410	28	3450	38	2.6

OFF-THE-ROAD (OTR) TYRE

OT - G2



GRADER TYRES

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
13.00-24	Industrial	16	350	1295	21	3350	58	4
14.00-24	Industrial	16	380	1350	27	3650	54	3.7
16.9-24	Industrial	16	590	1320	27	3900	38	2.6
17.5-25	Industrial	16	596	1320	26	3350	40	2.75
20.5-25	Industrial	16	500	1485	31.5	8820	33	2.2
23.5-25	Industrial	16	595	1610	32	10475	39	2.0

OFF-THE-ROAD (OTR) TYRE

OT - R3



DRIVE WHEEL TYRES

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
23.1-26	Industrial	16	595	1575	28	9645	33	228
23.1-26	Industrial	20	587	1560	25			

OFF-THE-ROAD (OTR) TYRE

OT - E3



EARTHMOVER (OT-E3) TYRES

						Single			Dual		
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
14.00-24	OTR	24	365	1345	25	5150	58	5.7	8500	83	5.7
14.00-25	OTR	24	375	1368	26	5150	58	5.7	8500	83	5.7
17.5-25	OTR	20	430	1370	30	5000	58	4.0	8250	83	5.7
20.5-25	OTR	20	530	1490	34	6000	47	3.2	9500	65	4.5
23.5-25	OTR	24	600	1625	36	8000	51	3.5	12500	70	4.8

OFF-THE-ROAD (OTR) TYRE

OT - E3-01



EARTHMOVER (OT-E3-01) TYRES

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
14.00-25	OTR	20	374	1375	24	5150	58	4.7	8500	83	5.7
16.00-25	OTR	32	450	1495	28	7290	94	6.5	12485	127	8.7
17.5-25	OTR	20	455	1380	22	5000	58	4.0	8250	83	5.7
20.5-25	OTR	24	515	1530	27	6000	47	3.2	9500	65	4.5
23.5-25	OTR	24	610	1835	31	8000	51	3.5	12500	70	4.8
26.5-25	OTR	24	665	1765	30	9000	40	2.7	1400	55	3.8

OFF-THE-ROAD (OTR) TYRE

OT - C1



COMPACTOR C-1 TYRE

Tyre Size	Ply Rating	Rim Width	TT/TL	Section Width	Overall Diameter	"Static Loaded Radius"	"Rolling Circum +/- 2.5%"	NSD	Load capacity	Inflation Pressure	Load Index	Speed
		(Inch)		(mm/inch)	(mm/inch)	mm	mm	mm	Kgs/Lbs	Bar/Psi		Kmph/Mph
13.00-24 C1	14	10x24	TL	302/11.9	1265/49.84	-	-	-	7120	85	-	-

SAFEWAY
A BRAND OF DEE RON AUTOMOTIVES LLP



FORKLIFT TYRES

INDUSTRIAL FORKLIFT TYRE

FKP - 555




INDUSTRIAL FORKLIFT TYRES

						at 15 kmph / 10 mph			at 10 kmph / 5 mph		
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
4.00-8	Fork Lift	8	117	414							
5.00-8	Fork Lift	8	143	476	11	1090	145	10	1420	145	10
6.009	Fork Lift	10	173	551	13	1332	123	8.5	1730	123	8.5
6.50-10	Fork Lift	12	180	590	14	2145	130	9	1650	130	9
7.00-12	Fork Lift	12	194	685	15.5	2060	123	8.5	2680	123	8.5
8.15-15	Fork Lift	14	200	725	16.5	3373	140	9.6	2595	140	9.6
8.25-15	Fork Lift	14	235	850	17	4225	116	8	3250	116	8

INDUSTRIAL FORKLIFT TYRE

FKL - 555

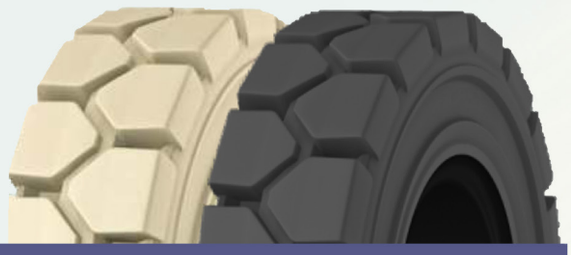

INDUSTRIAL SOLID TYRES

SIZE	TYPE	Rim Width	Section Width		Overall Diameter		Load Capacity			
							Load Wheel		Steer Wheel	
		Inch	mm	inch	mm	inch	kg	lbs	kg	lbs
4.00-8	STD/LIP	3.0	406	16.0	99	3.9	950	2090	730	1606
5.00-8	STD/LIP	3.0	455	17.9	124	4.9	1420	3124	1090	2398
15x4 1/2-8	STD/LIP	3.0	386	15.2	114	4.5	1040	2288	800	1760
16x6-8	STD/LIP	4.3	406	16.0	163	6.4	1495	3289	1150	2530
18x7-8	STD/LIP	4.3	457	18.0	150	5.9	2145	4719	1650	3630
6.00-9	STD/LIP	4.0	523	20.6	142	5.6	1885	4147	1450	3190
140/55-9	STD/LIP	4.0	391	15.4	142	5.6	1170	2574	900	1980
21x8-9	STD/LIP	6.0	526	20.7	193	7.6	2755	6061	2120	4664
6.50-10	STD/LIP	5.0	577	22.7	160	6.3	2340	5148	1800	3960
7.50-10	STD/LIP	5.5	653	25.7	180	7.1	3070	6754	2360	5192
200x50-10	STD/LIP	6.5	452	17.8	188	7.4	2470	5434	1900	4180
23x9-10	STD/LIP	6.5	572	22.5	211	8.3	3445	7579	2650	5830
7.00-12	STD/LIP	5.0	645	25.4	175	6.9	2920	6424	2240	4928
23x10-12	STD/LIP	8.0	592	23.3	245	9.7	3770	8294	2900	6380
27x10-12	STD/LIP	8.0	650	25.6	249	9.8	3900	8580	3000	6600
7.00-15	STD/LIP	5.5	701	27.6	191	7.5	3545	7799	2725	5995
7.50-15	STD/LIP	5.5	719	28.3	191	7.5	3900	8580	3000	6600
250-15	STD/LIP	7.0	734	28.9	236	9.3	4750	10450	3650	8030
8.15-15	STD/LIP	7.0	688	27.1	213	8.4	3445	7579	2650	5830
8.25-15	STD/LIP	6.5	780	30.7	201	7.9	4750	10450	3650	8030
300-15	STD/LIP	8.0	820	32.3	257	10.1	5850	12870	4500	9900
28x12.5-15	STD/LIP	9.7	688	27.1	315	12.4	5525	12155	4250	9350
355/65-15	STD/LIP	9.7	820	32.3	300	11.8	7800	17160	6000	13200
7.50-16	STD/LIP	5.5	782	30.8	201	7.9	3908	8598	2831	6228
8.00-16	STD/LIP	UNDER DEVELOPMENT								
7.50-20	STD/LIP	6.0	883	34.7	179	7.1	3840	8448	3200	7040
8.25-20	STD/LIP	7.0	988	38.9	231	9.1	4400	9680	3675	8085
9.00-20	STD/LIP	UNDER DEVELOPMENT								
9.00-20	STD/LIP	7.0	1026	40.4	241	9.5	5340	11748	4450	9790
9.00-20	STD/LIP	7.5	1026	40.4	241	9.5	5340	11748	4450	9790
10.00-20	STD/LIP	7.5	1026	40.4	241	9.5	6000	13200	5000	11000
10.00-20	STD/LIP	8.0	1026	40.4	241	9.5	6000	13200	5000	11000
11.00-20	STD/LIP	8.0	1052	41.4	263	10.4	6510	14322	5245	11540
12.00-20	STD/LIP	8.5	1102	43.4	295	11.6	7500	16500	6250	13750
12.00-20	STD/LIP	UNDER DEVELOPMENT								
12.00-24	STD/LIP	8.5	1194	47.0	300	11.8	8000	17600	6650	14630
12.00-24	STD/LIP	10.0	1194	47.0	300	11.8	8000	17600	6650	14630
14.00-24	STD/LIP	10.0	1300	51.2	335	13.2	11000	24200	9175	20185

SAFEWAY

A BRAND OF DEE RON AUTOMOTIVES LLP



MOTORCYCLE TYRES

MOTORCYCLE TYRE

SFM-101



Tyre Size	PR Rating	TT/TL	Pattern Name
3.00-17	6	TT	SFM-101
3.00-18	6	TT	SFM-101

MOTORCYCLE TYRE

SFM-115



Tyre Size	PR Rating	TT/TL	Pattern Name
3.00-17	6	TT	SFM-115

MOTORCYCLE TYRE


SFM-120



Tyre Size	PR Rating	TT/TL	Pattern Name
3.00-18	6	TL	SFM-120
90/90-17	4	TL	SFM-120
2.75-17	4	TL	SFM-120

MOTORCYCLE TYRE

SFM-125



Tyre Size	PR Rating	TT/TL	Pattern Name
2.75-18	4	TT	SFM-125
70/90-17	4	TL	SFM-125

MOTORCYCLE TYRE

SFM-130



Tyre Size	PR Rating	TT/TL	Pattern Name
2.75-18	6	TT	SFM-130
3.00-17	6	TT	SFM-130
3.00-18	6	TT	SFM-130

MOTORCYCLE TYRE

SFM-135



Tyre Size	PR Rating	TT/TL	Pattern Name
90/90-12	4	TT	SFM-135

MOTORCYCLE TYRE

SFM-140



Tyre Size	PR Rating	TT/TL	Pattern Name
90/90-18	6	TL	SFM-140
2.75-18	4	TL	SFM-140
2.75-17	4	TT	SFM-140

MOTORCYCLE TYRE

SFM-145



Tyre Size	PR Rating	TT/TL	Pattern Name
2.75-18	4	TL	SFM-145
90/100-10	4	TL	SFM-145
90/90-12	4	TL	SFM-145
110/90-13	4	TL	SFM-145
120/70-12	4	TL	SFM-145

MOTORCYCLE TYRE

SFM-150



Tyre Size	PR Rating	TT/TL	Pattern Name
3.00-17	6	TT	SFM-150
3.00-18	6	TT	SFM-150
2.75-17	4	TT	SFM-150
110/90-16	6	TL	SFM-150

MOTORCYCLE TYRE

SFM-155



Tyre Size	PR Rating	TT/TL	Pattern Name
3.00-17	6	TT	SFM-155

MOTORCYCLE TYRE

SFM-162



Tyre Size	PR Rating	TT/TL	Pattern Name
2.50-16	4	TT	SFM-162

MOTORCYCLE TYRE

SFM-164



Tyre Size	PR Rating	TT/TL	Pattern Name
2.75-18	4	TT	SFM-164

MOTORCYCLE TYRE

SFM-166



Tyre Size	PR Rating	TT/TL	Pattern Name
90/90-12	4	TT	SFM-166
2.50-17	4	TT	SFM-166
3.75-12	4	TT	SFM-166
90/90-12	4	TL	SFM-166

MOTORCYCLE TYRE

SFM-180



Tyre Size	PR Rating	TT/TL	Pattern Name
3.00-17	6	TT	SFM-180
2.75-18	4	TT	SFM-180
3.00-18	6	TT	SFM-180

MOTORCYCLE TYRE

SFM-185



Tyre Size	PR Rating	TT/TL	Pattern Name
90/90-12	4	TL	SFM-185

MOTORCYCLE TYRE

SFM-190



Tyre Size	PR Rating	TT/TL	Pattern Name
2.75-18	4	TT	SFM-190

MOTORCYCLE TYRE

SFM-193



Tyre Size	PR Rating	TT/TL	Pattern Name
2.75-17	4	TT	SFM-193

MOTORCYCLE TYRE

SFM-195



Tyre Size	PR Rating	TT/TL	Pattern Name
2.75-18	4	TT	SFM-195

MOTORCYCLE TYRE

SFM-198



Tyre Size	PR Rating	TT/TL	Pattern Name
2.75-17	4	TT	SFM-198

MOTORCYCLE TYRE

SFM-208



Tyre Size	PR Rating	TT/TL	Pattern Name
110/90-16	6	TL	SFM-208

MOTORCYCLE TYRE

SFM-215



Tyre Size	PR Rating	TT/TL	Pattern Name
2.75-18	4	TT	SFM-215
2.75-17	4	TL	SFM-215
3.00-18	6	TT	SFM-215

MOTORCYCLE TYRE

SFM-222



Tyre Size	PR Rating	TT/TL	Pattern Name
90/90-17	4	TL	SFM-222

MOTORCYCLE TYRE

SFM-225



Tyre Size	PR Rating	TT/TL	Pattern Name
2.75-17	4	TT	SFM-225
2.75-18	4	TT	SFM-225

MOTORCYCLE TYRE

SFM-230



Tyre Size	PR Rating	TT/TL	Pattern Name
2.75-18	4	TT	SFM-230

MOTORCYCLE TYRE

SFM-235



Tyre Size	PR Rating	TT/TL	Pattern Name
90/90-14	4	TL	SFM-235
100/80-14	4	TL	SFM-235



SAFEWAY
A BRAND OF DEE RON AUTOMOTIVES LLP


BUTYL TUBES

TUBES | AGRICULTURE, INDUSTRIAL & OTR


TR-13


TR-14


TR-15


TR-75A


TR-78A


TR-218A


TR-220A


SP-1000

SIZE	VALVE
3.50-6	TR-13 (V2.01.1) / V1-08-3
3.50-8	TR-13 (V2.01.1) / V1-08-3
4.00-8	TR-13 (V2.01.1) / V1-08-3
4.00-10	TR-13 (V2.01.1)
4.50-10	TR-13 (V2.01.1)
5.00-10	TR-13 (V2.01.1)
5.00-12	TR-13 (V2.01.1)
6.00-12	TR-13 (V2.01.1) / TR-15
7.00-12	TR-13 (V2.01.1) / TR-15 / TR-75A
10.0/80-12	TR-13 (V2.01.1) / TR-15 (V2.01.2)
200/60-14.5	TR-13 (V2.01.1) / TR-15 (V2.01.2)
10.0/75-15.3	TR-13 (V2.01.1) / TR-15 (V2.01.2)
11.5/80-15.3	TR-13 (V2.01.1) / TR-15 (V2.01.2)
4.00-16	TR-15 (V2.01.2)
4.50-16	TR-15 (V2.01.2)
5.00-16	TR-15 (V2.01.2)
5.50-16	TR-15 (V2.01.2)
6.00-16	TR-15 (V2.01.2)
6.00-16	TR-15 (V2.01.2)
6.50-16	TR-15 (V2.01.2) / TR-75A (V3.02.27)
7.00-16	TR-15 (V2.01.2) / TR-75A (V3.02.27)
7.00-16	TR-218A (V4.01.1)
7.50-16	TR-15 (V2.01.2) / TR-75A (V3.02.27)
7.50-16	TR-218A (V4.01.1)
8.25-16	TR-15 (V2.01.2) / TR-75A (V3.02.27)
8.25-16	TR-218A (V4.01.1)
9.00-16	TR-15 (V2.01.2) / TR-75A (V3.02.27)
9.00-16	TR-218A (V4.01.1) / TR-15 (V2.01.2) / TR-75A (V3.02.27)
10.00-16	TR-15 (V2.01.2)
10.00-16	TR-218A (V4.01.1)
10.5-16	TR-15 (V2.01.2)
10.5-16	TR-218A (V4.01.1)
10.5/65-16	TR-15 (V2.01.2)
10.5/65-16	TR-218A (V4.01.1)
9.0/70-16	TR-15 (V2.01.2)
9.0/70-16	TR-218A (V4.01.1)
9.0/75-16	TR-15 (V2.01.2)
9.0/75-16	TR-218A (V4.01.1)
250/80-16	TR-15 (V2.01.2)
250/80-16	TR-218A (V4.01.1)
280/70-16	TR-15 (V2.01.2)
280/70-16	TR-218A (V4.01.1)
10-16.5	TR-15 (V2.01.2)
10-16.5	TR-218A (V4.01.1)

SIZE	VALVE
12-16.5	TR-15 (V2.01.2)
12-16.5	TR-218A (V4.01.1)
6.00-18	TR-15 (V2.01.2)
6.00-18	TR-218A (V4.01.1)
7.50-18	TR-15 (V2.01.2)
7.50-18	TR-218A (V4.01.1)
12.5/80-18	TR-15 (V2.01.2)
12.5/80-18	TR-218A (V4.01.1)
13.0/65-18	TR-15 (V2.01.2)
13.0/75-18	TR-218A (V4.01.1)
14.5/80-18	TR-218A (V4.01.1)
4.50-19	TR-14 (V2.01.3) / TR-15 (V2.01.2)
5.00-19	TR-14 (V2.01.3) / TR-15 (V2.01.2)
6.00-19	TR-14 (V2.01.3) / TR-15 (V2.01.2)
7.00-19	TR-14 (V2.01.3)
8.00-19	TR-14 (V2.01.3)
6.00-20	TR-15 (V2.01.2)
6.50-20	TR-15 (V2.01.2)
7.00-20	TR-15 (V2.01.2)
7.50-20	TR-15 (V2.01.2)
8.00/8.3-20	TR-15 (V2.01.2) / TR-218A (V4.01.1)
8.00/8.3-20	TR-218A (V4.01.1)
9.50-20	TR-218A (V4.01.1)
10.00-20	TR-218A (V4.01.1) / TR-78A (V3.09.18)
8.3-22	TR-218A (V4.01.1)
9.5-22	TR-218A (V4.01.1)
8.3-24	TR-218A (V4.01.1)
9.5-24	TR-218A (V4.01.1)
11.2-24	TR-218A (V4.01.1)
12.4-24	TR-218A (V4.01.1)
13.00-24	TR-218A (V4.01.1)
13.00-24	TR-218A (V4.01.1)
13.00-24	TR-179A (V3.09.20)
14.00-24	TR-179A (V3.09.20)
14.00-24	TR-218A (V4.01.1)
14.00-24	TRJ-1175C / SP-1000
14.00-24	TR-218A (A4.01.1) / TR-220
13.6-24	TR-218A (V4.01.1)
14.9-24	TR-218A (V4.01.1)
15.5/80-24	TR-218A (V4.01.1)
16.5/85-24	TR-218A (V4.01.1)
14.00-25	TR-218A (V4.01.1)
14.00-25	TR-179A (V3.09.20)
14.00-25	TRJ-1175C / SP-1000

TUBES | AGRICULTURE, INDUSTRIAL & OTR


TR-218A


TR-220A

SIZE	VALVE
14.00-25	TR-218A (V4.01.1) / TR-220
13.6-26	TR-218A (V4.01.1)
14.9-26	TR-218A (V4.01.1)
23.1-26	TR-218A (V4.01.1) / TR-220
11.2-28	TR-218A (V4.01.1)
12.4-28	TR-218A (V4.01.1)
13.6-28	TR-218A (V4.01.1)
14.9-28	TR-218A (V4.01.1)
16.9-28	TR-218A (V4.01.1)
16.9-30	TR-218A (V4.01.1)
18.4-30	TR-218A (V4.01.1)
8.3-32	TR-218A (V4.01.1)

SIZE	VALVE
9.5-32	TR-218A (V4.01.1)
11.2-36	TR-218A (V4.01.1)
12.4-36	TR-218A (V4.01.1)
11.2-38	TR-218A (V4.01.1)
12.4-38	TR-218A (V4.01.1)
13.6-38	TR-218A (V4.01.1)
14.00-38	TR-218A (V4.01.1)
14.9-38	TR-218A (V4.01.1)
15.5-38	TR-218A (V4.01.1)
16.9-38	TR-218A (V4.01.1)
18.4-38	TR-218A (V4.01.1)
20.8-38	TR-218A (V4.01.1)


TR-13


TR-29


V1-08-01


V1-08-03

SIZE	VALVE
3.50-8	V1.08.3 / TR-13
4.00-8	V1.08.3 / TR-13
90/100-10	V1.08.1
100/90-10	V1.08.1
2.50-10	V1.08.1
2.75-10	V1.08.1
3.50-10	V1.08.1
4.00-10	V1.08.1
4.50-10	TR-13 (V2.01.1)
5.00-10	TR-13 (V2.01.1)
3.00-12	TR-29 (V1.09.2)
3.75-12	V1.08.1
90/90-12	V1.08.1
110/90-12	V1.08.1
100/80-12	TR-29 (V1.09.2) / V1.08.1
110/80-12	TR-29 (V1.09.2) / V1.08.1
2.75/3.00-14	TR-29 (V1.09.2)
2.00/2.25-16	TR-29 (V1.09.2)
2.50/2.75-16	TR-29 (V1.09.2)
3.00-16	TR-29 (V1.09.2)
3.25-16	TR-29 (V1.09.2)
3.50-16	TR-29 (V1.09.2)
2.00/2.25-17	TR-29 (V1.09.2)
2.50-17	TR-29 (V1.09.2)
2.75/3.00-17	TR-29 (V1.09.2)
90/90-17	TR-29 (V1.09.2)

SIZE	VALVE
70/100-17	TR-29 (V1.09.2)
100/90-17	TR-29 (V1.09.2)
120/80-17	TR-29 (V1.09.2)
2.25/2.50-18	TR-29 (V1.09.2)
2.75/3.00-18	TR-29 (V1.09.2)
4.10/4.60/4.75-18	TR-29 (V1.09.2)
90/90-18	TR-29 (V1.09.2)
100/90-18	TR-29 (V1.09.2)
110/90-18	TR-29 (V1.09.2)
110/80-18	TR-29 (V1.09.2)
110/70-18	TR-29 (V1.09.2)
120/70-18	TR-29 (V1.09.2)
130/70-18	TR-29 (V1.09.2) / V1.08.1
130/60-18	TR-29 (V1.09.2) / V1.08.1
4.00/4.10-18	TR-29 (V1.09.2) / V1.08.1
2.75/3.00-19	TR-29 (V1.09.2)
3.25/3.50-19	TR-29 (V1.09.2)
110/90-19	TR-29 (V1.09.2)
120/90-19	TR-29 (V1.09.2)
110/80-19	TR-29 (V1.09.2)
120/80-19	TR-29 (V1.09.2)
130/70-19	TR-29 (V1.09.2)
300/3.25-21	TR-29 (V1.09.2)
80/100-21	TR-29 (V1.09.2)
90/100-21	TR-29 (V1.09.2)
2.75/3.00-23	TR-29 (V1.09.2)




BUR/LIGHT & TRUCK TUBES

SIZE	VALVE
6.50-15	TR-15 (V2.01.2)
6.70-15	TR-15 (V2.01.2)
7.00-15	TR-15 (V2.01.2) / TR-75A (V3.02.27)
7.50-15	TR-15 (V2.01.2) / TR-75A (V3.02.27)
8.15-15	TR-15 (V2.01.2) / TR-75A (V3.02.27)
8.25-15	TR-15 (V2.01.2) / TR-75A (V3.02.27)
8.25-15	TR-75A / V3.02.27
6.00-16	TR-15 (V2.01.2)
6.50-16	TR-15 (V2.01.2) / TR-75A (V3.02.27)
7.50-16	AB 15 82 / TR-75A (V3.02.27)
8.25-16	TR-77A (V3.09.16) / TR-75A (V3.02.27)
9.00-16	TR-77A (V3.09.16)
10.00-16	TR-77A / V3.09.15 / TR-177A / V3.02.16
12.00-18	TR-76A / V3.02.14

SIZE	VALVE
13.00-18	TR-76A / V3.09.14
6.50-20	TR-15 / V3.01.2
7.50-20	TR-15 / V3.01.2
8.25-20	TR-175A / V3.09.17
9.00-20	TR-175A / V3.09.17
9.00R-20	TR-175A / V3.09.17
10.00-20	TR-78A (V3.09.18)
10.00R-20	TR-78A (V3.09.18)
11.00-20	TR-78A (V3.09.18)
11.00R-20	TR-78A (V3.09.18)
12.00-20	TR-78A (V3.09.18)
12.00R-20	TR-78A (V3.09.18)
12.00-24	TR-78A (V3.09.18)
12.00R-24	TR-78A (V3.09.18)

INDUSTRIAL FORKLIFT & TRUCK TUBES

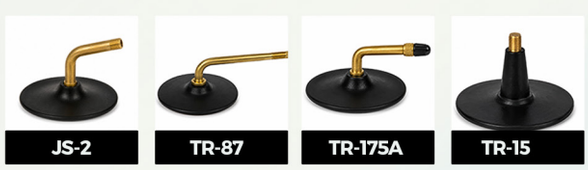

SIZE	VALVE
4.00-8	TR-13 / TR-87 / V1.08.3
4.00-8	TR-13 / JS-2 / V1.08.3
5.00-8	TR-13 / JS-2
5.00-8	TR-13 / TR-87 / JS-2
5.00-10	JS-2
5.00-10	TR-13 (V2.01.1)
5.00-10	JS-2
6.50-10	V1.08.1 / TR-15
6.50-10	JS-2
6.50-10	TR-75A
7.00-12	TR-75A
7.00-12	JS-2
23X5	TR-87
23X5	JS-2
2.15-15	TR-75A / JS-2
7.00-15	TR-75A / TR-15

SIZE	VALVE
7.00-15	JS-2
7.50-15	TR-75A
7.50-15	JS-2
8.15-15	TR-75A
8.15-15	JS-2
8.25-15	TR-15 (V2.01.2) / TR-75A
8.25-15	JS-2
250-15	JS-2
250-15	TR-15
300-15	TR-75A / TR-78A
300-15	JS-2
9.00-20	TR-78A (V3.09.18) / TR-175A
10.00-20	TR-78A (V3.09.18)
11.00-20	TR-78A (V3.09.18)
12.00-20	TR-78A (V3.09.18)

PASSENGER CAR TUBES



SIZE	VALVE
145-10	TR-13 (V2.01.1)
125/135-12	TR-13 (V2.01.1)
125/135-12	TR-13 (V2.01.1)
145/70R-12	TR-13 (V2.01.1)
135/80R-12	TR-13 (V2.01.1)
175/70R-12	TR-13 (V2.01.1)
155/80D-12	TR-13 (V2.01.1)
155/80R-12	TR-13 (V2.01.1)
135/70R-13	TR-13 (V2.01.1)
135R/145R-13	TR-13 (V2.01.1)
140/150R-13	TR-13 (V2.01.1)
145/70R-13	TR-13 (V2.01.1)
145/70R-13	TR-13 (V2.01.1)
155/165R-13	TR-13 (V2.01.1)
165/65R-13	TR-13 (V2.01.1)
175/80R-13	TR-13 (V2.01.1)
175R/185R-13	TR-13 (V2.01.1)
135/70R-13	TR-13 (V2.01.1)
145R/70-13	TR-13 (V2.01.1)
155/70R-13	TR-13 (V2.01.1)
165/70R-13	TR-13 (V2.01.1)
175/70R-13	TR-13 (V2.01.1)
6.00/6.50-13	TR-13 (V2.01.1)
135R/145R-14	TR-13 (V2.01.1)
145/70R-14	TR-13 (V2.01.1)
140R/150R-14	TR-13 (V2.01.1)
155R/165R-14	TR-13 (V2.01.1)
175/70R-14	TR-13 (V2.01.1)
4.00/4.50-14	TR-13 (V2.01.1)
165/175/70R-14	TR-13 (V2.01.1)
175/185R-14	TR-13 (V2.01.1)
195/205R-14	TR-13 (V2.01.1)
165/175/65R-14	TR-13 (V2.01.1)
165/175/70R-14	TR-13 (V2.01.1)
185/70R-14	TR-13 (V2.01.1)

SIZE	VALVE
195/70R-14	TR-13 (V2.01.1)
170R/180R-14	TR-13 (V2.01.1)
195R/205R-14	TR-13 (V2.01.1)
205/70R-14	TR-13 (V2.01.1)
205/80R-14	TR-13 (V2.01.1)
125R-15	TR-13 (V2.01.1)
135R/145R-15	TR-13 (V2.01.1)
145/70R-15	TR-13 (V2.01.1)
140R/150R-15	TR-13 (V2.01.1)
155R/165R-15	TR-13 (V2.01.1)
175/70R-15	TR-13 (V2.01.1)
160/R-15	TR-13 (V2.01.1)
125-15	TR-13 (V2.01.1)
4.00/4.50-15	TR-13 (V2.01.1)
5.00-15	TR-13 (V2.01.1)
5.90-15	TR-13 (V2.01.1)
F78-15	TR-13 (V2.01.1)
175/185R-15	TR-13 (V2.01.1)
165/175/70R-15	TR-13 (V2.01.1)
175/185/70R-15	TR-13 (V2.01.1)
175/185/70R-15	TR-13 (V2.01.1)
195/205R-15	TR-13 (V2.01.1)
205/70R-15	TR-13 (V2.01.1)
215/225/235/70R-15	TR-13 (V2.01.1)
215/225R-15	TR-13 (V2.01.1)
235/75R15	TR-13 (V2.01.1)
235/70R15	TR-13 (V2.01.1)
225/70R15	TR-13 (V2.01.1)
255/70R15	TR-13 (V2.01.1)
175/185R-16	TR-13 (V2.01.1)
195/205/215/70R-16	TR-13 (V2.01.1)
195/205/215/70R-16	TR-13 (V2.01.1)
175R/185R-16	TR-15 (V2.01.2)
195R/205R-16	TR-15 (V2.01.2)
215R/225R-16	TR-15 (V2.01.2)


IMPLEMENT AND TRAILER TUBES



SIZE	VALVE
6.70-15	TR-15 (V2.01.2)
7.60-15	TR-15 (V2.01.2) / TR-75A (V3.09.13)
9.5L-15	TR-75 A (V3.09.13)
11L-15	TR-15 (V2.01.2) / TR-218A (V4.01.1)
12.5.L-15	TR-15 (V2.01.2) / TR-218A (V4.01.1)

SIZE	VALVE
10.0/75-15.3	TR-15 (V2.01.2) / TR-218A (V4.01.1)
11.5/80-15.3	TR-15 (V2.01.2) / TR-218A (V4.01.1)
11L.16	TR-15 (V2.01.2) / TR - 75A (V3.09.13) TR-77A / AC3 5 82 / V3.09.16
12.5L-16	TR-15 (V2.01.2)


TR-13


TR-87

LAWN & GARDEN TUBES

SIZE	VALVE
2.50/2.80-4	TR-87
3.00-4	TR-87
4.00-4	TR-87
4.10/3.50-5	TR-13
11x4.00-5	TR-13
11x6.00-5	TR-87
3.50/4.00-6	TR-13 / TR-87
13x.5.00-6	TR-13 / TR-87

SIZE	VALVE
15x.6.00-6	TR-13
3.50.-7	TR-13
4.00-7	TR-13
3.00/3.25-8	TR-13
3.50-8	TR-13
145/70-8	TR-13
16x6.50-8	TR-13
18x8.50-8	TR-13

UTILITY VEHICLES TUBES


TR-13

SIZE	VALVE
145-10	TR-13 (V2.01.1)
5.00-10	TR-13 (V2.01.1)
4.50-12	TR-13 (V2.01.1)
5.00-12	TR-13 (V2.01.1)
145/80D-12	TR-13 (V2.01.1)
155/80D-12	TR-13 (V2.01.1)

SIZE	VALVE
155/80R-12	TR-13 (V2.01.1)
165/70R-13	TR-13 (V2.01.1)
165/70-13	TR-13 (V2.01.1)
165/175/70-14	TR-13 (V2.01.1)
195/205R-14	TR-13 (V2.01.1)
185R-16	TR-13 (V2.01.1)

FLAPS



SIZE
5.00-8
6.00-9
6.50-10
7.00-12
8.25-15
6.00-16
6.50-16
7.00-16
7.50-16
8.25-16
9.00-16

SIZE
7.50-20
8.25-20
9.00-20
10.00-20
11.00-20
12.00-20
12.00-24
13.00-24
14.00-24
14.00-25
18.00-25

SAFEWAY
A BRAND OF DEE RON AUTOMOTIVES LLP

CORPORATE OFFICE

SCO No. 21, SEC 17, Omaxe Residency
Pakhowal Road, Ludhiana, Punjab - 142022

FACTORY

Plot No 115, Dhandari Kalan,
Ludhiana, Punjab - 141010

CONTACT DETAILS

Call/WhasApp
+91 99157 62182

Email Address
director@safewaytyre.com

MAKE IN INDIA

www.safewaytyre.com

Safeway Tyre